



Tehničke karakteristike:

Promjer držača : FI 25 / 36 / 45 / 50 / 60 / 80 mm

Navoj : M6 do M16


Visina ugradnje stakla : 8 do 40 mm

GLASMARTE

GM POINT

DRŽAČ STAKLA

GM POINT

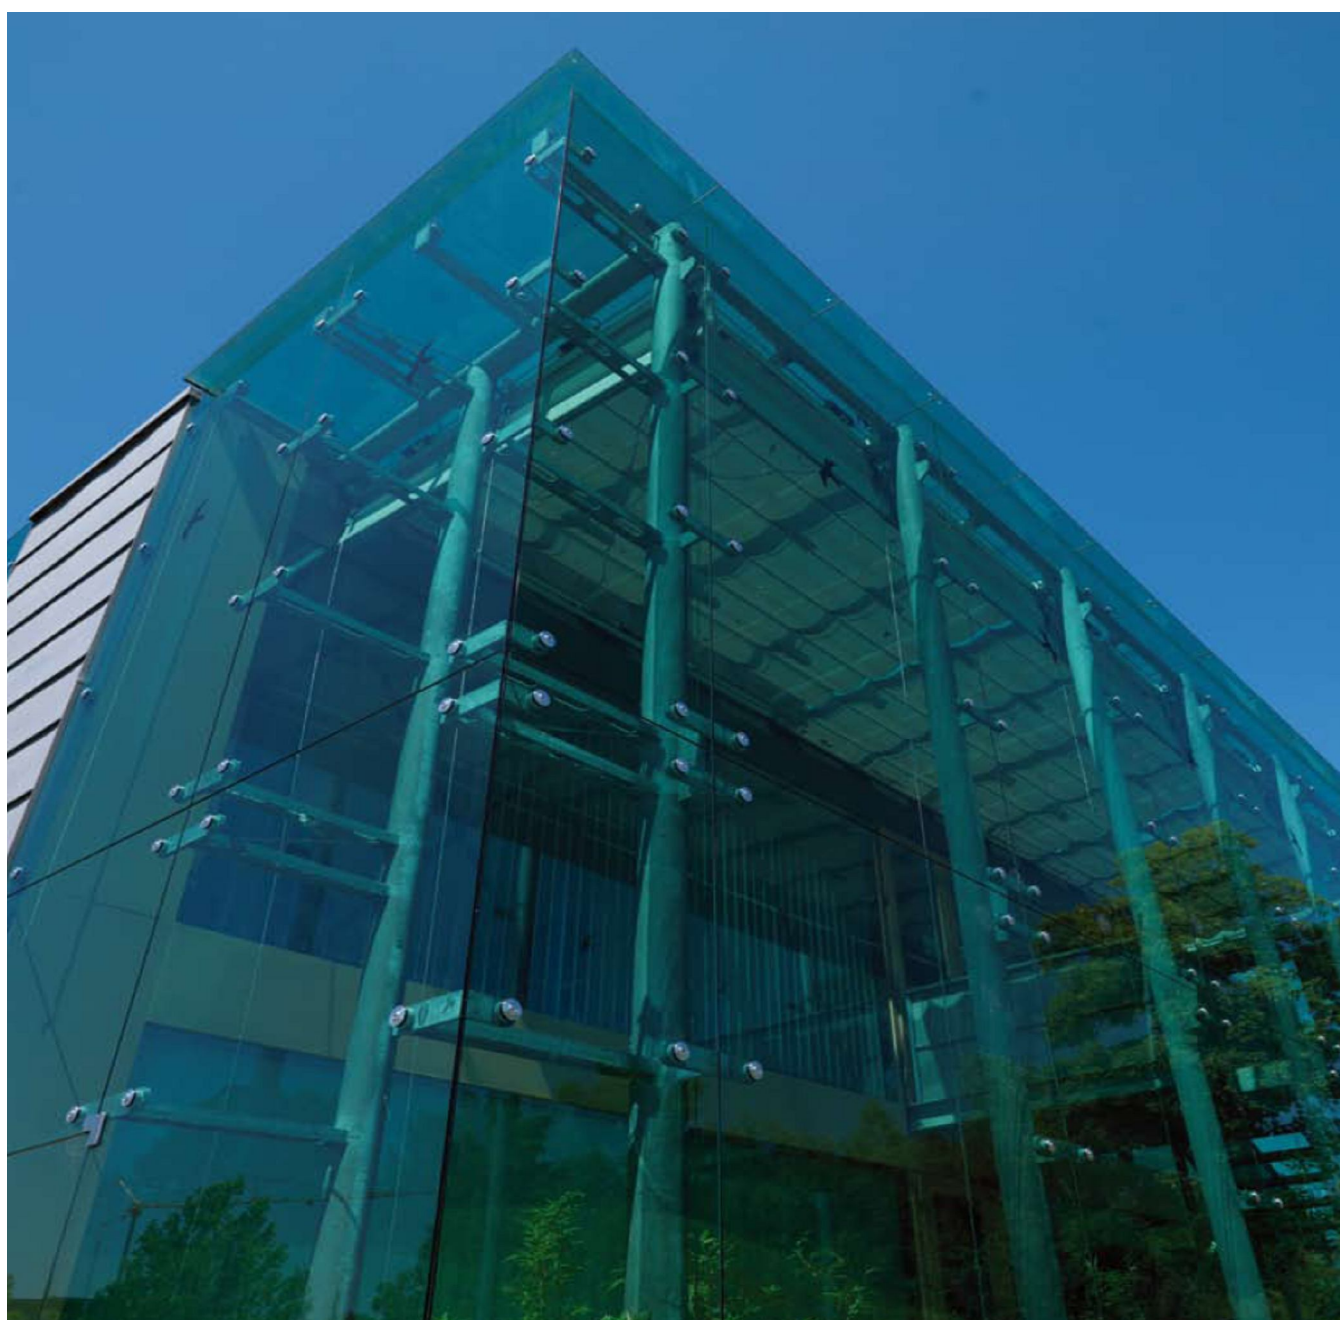

			Ø 25 mm	GM POINT® P 25
			Ø 36 mm	GM POINT® P 36 GM POINT® P 36 HUK (für Holzunterkonstruktion) GM POINT® P 36 RR (für Rundrohr)
			Ø 45 mm	GM POINT® P 45 GM POINT® P 45 / 30 ST GM POINT® P 45 / 5 SP
TRAV + TRPV konform			Ø 50 mm	GM POINT® P 50
				
TRAV + TRPV konform	TRAV + TRPV konform		Ø 60 mm	GM POINT® P 60 / 7 SP GM POINT® P 60 / 22 SP
				
TRAV + TRPV konform	TRAV + TRPV konform		Ø 80 mm	GM POINT® P 80 / 9 SP GM POINT® P 80 / 29 SP
				

Primjena GM POINT držača prema debljini stakla :

GM POINT P 25	Debljina stakla:	4 - 6 mm
GM POINT P 36	Debljina stakla:	4 - 6 mm
GM POINT P 36 HUK	Debljina stakla:	4 - 6 mm
za drvenu podkonstrukciju		
GM POINT P 36 RR	Debljina stakla:	4 - 6 mm
za okruglu cijev		
GM POINT P 45	Debljina stakla:	4 - 19 mm
GM POINT P 45 / 30 ST	Debljina stakla:	8 - 20 mm
GM POINT P 45 / 5 SP	Debljina stakla:	8 - 20 mm
GM POINT P 50	Debljina stakla:	4 - 19 mm
GM POINT P 60 / 7 SP	Debljina stakla:	8 - 20 mm
GM POINT P 60 / 22 SP	Debljina stakla:	8 - 22 mm
GM POINT P 80 / 9 SP	Debljina stakla:	8 - 22 mm
GM POINT P 80 / 29 SP	Debljina stakla:	8 - 22 mm